




LIGHT/MEDIUM DUTY HARD RUBBER CASTER

APPLICATIONS:

Hard rubber molded composition. Wheel is impervious to oil, grease, and gasoline. High - load rating. good mobility, high-impact resistance, and good floor protection. Used on dollies, carts and racks.

SPECIFICATIONS:

SWIVEL: Two rows of ball bearings in hardened raceways.
FORK: 1/8" formed steel plate
AXLE: 1/4" diameter bolt & nut for small plate;
 3/8" diameter nut and bolt for large plate.
FINISH: Chrome or Zinc Plated.

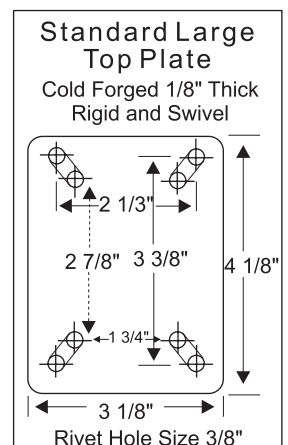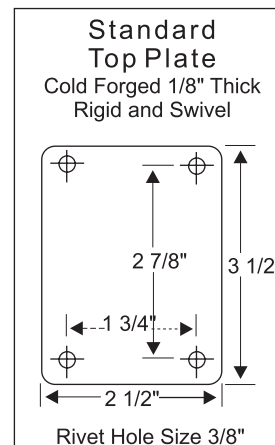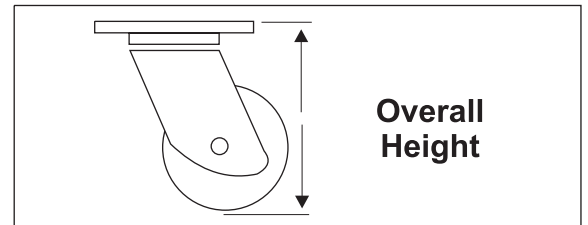

Part #	Description	Packing (PC)	Overall Height (inches)	Weight (LB)	Capacity (LB)
S5×1.25	5"×1 1/4" Small Plate Hard Rubber Swivel	500	6"	2 1/2	400
R5×1.25	5"×1 1/4" Small Plate Hard Rubber Rigid	500	6"	2 1/4	400
S4×1.25	4"×1 1/4" Small Plate Hard Rubber Swivel	800	5"	2	350
R4×1.25	4"×1 1/4" Small Plate Hard Rubber Rigid	800	5"	1 1/2	350
S3×1.25	3"×1 1/4" Small Plate Hard Rubber Swivel	1200	4"	1 1/2	275
R3×1.25	3"×1 1/4" Small Plate Hard Rubber Rigid	1200	4"	1	275
LS5×1.25	5"×1 1/4" Large Plate Hard Rubber Swivel	500	6"	2 3/4	400
LR5×1.25	5"×1 1/4" Large Plate Hard Rubber Rigid	500	6"	2 1/2	400
LS4×1.25	4"×1 1/4" Large Plate Hard Rubber Swivel	800	5"	2 1/4	350
LR4×1.25	4"×1 1/4" Large Plate Hard Rubber Rigid	800	5"	1 3/4	350
LS3×1.25	3"×1 1/4" Large Plate Hard Rubber Swivel	1200	4"	1 3/4	275
LR3×1.25	3"×1 1/4" Large Plate Hard Rubber Rigid	1200	4"	1 1/4	275

