




LIGHT/MEDIUM DUTY POLYURETHANE ON POLYPROPYLENE CASTER With Plastic Thread Guards

APPLICATIONS:

Polyurethane tread, 90+ shore (A) durometer, chemically bonded to Polypropylene core, non-marking floor protection, resistant to oil, grease, water and most solvents, available in a variety of colors.

SPECIFICATIONS:

SWIVEL: Two rows of ball bearings in hardened raceways.
FORK: 1/8" formed steel plate
AXLE: 1/4" diameter bolt and nut for small plate; 3/8" diameter bolt & nut for large plate.
FINISH: Chrome or Zinc Plated.

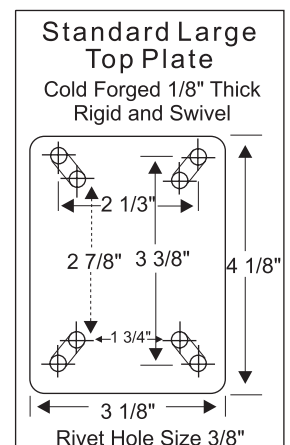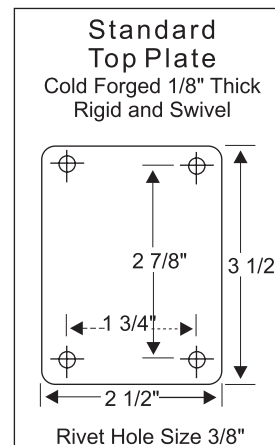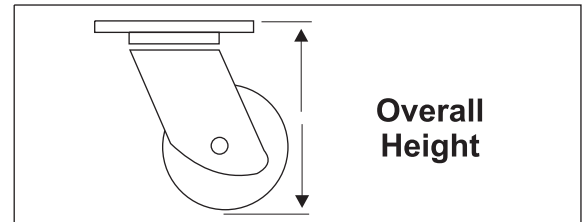

Part #	Description	Packing (PC)	Overall Height (inches)	Weight (LB)	Capacity (LB)
S5 × 1.25PP	5" × 1 1/4" Small Plate Polyurethane on Polypropylene Swivel	500	6"	2 3/4	350
R5 × 1.25PP	5" × 1 1/4" Small Plate Polyurethane on Polypropylene Rigid	500	6"	2 1/2	350
S4 × 1.25PP	4" × 1 1/4" Small Plate Polyurethane on Polypropylene Swivel	800	5"	2	300
R4 × 1.25PP	4" × 1 1/4" Small Plate Polyurethane on Polypropylene Rigid	800	5"	1 1/4	300
LS5 × 1.25PP	5" × 1 1/4" Large Plate Polyurethane on Polypropylene Swivel	500	6"	3	350
LR5 × 1.25PP	5" × 1 1/4" Large Plate Polyurethane on Polypropylene Rigid	500	6"	2 1/2	350
LS4 × 1.25PP	4" × 1 1/4" Large Plate Polyurethane on Polypropylene Swivel	800	5"	2 1/4	300
LR4 × 1.25PP	4" × 1 1/4" Large Plate Polyurethane on Polypropylene Rigid	800	5"	1 1/2	300